

highblue®
THE BRIGHTER IDEA

10th
Anniversary

2018

Taking Innovation to

New Era



In the past ten years, Big Blue Dive Lights lit up the diving world with its cutting-edge technical innovation and sleek designs. Divers of all skill levels have experienced the reliability and quality that comes with owning a Big Blue Dive Light. Now with over 40 lights and hundreds of accessories for which to choose, Big Blue is the go-to brand for world – famous photographers, videographers, technical divers, recreational divers, and everyone in between.



VL4000P

Li ion Rechargeable Battery LED Video Light



Available in 2 colors

SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED
Light output (Flood beam mode)	400Lm (level I), 1000 Lm (level II) 2000 Lm (level III), 4000 Lm (level IV)
Light output (Red color mode)	200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs(level III) 6 hrs(level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Sturdy glove for hands-free operation underwater



4 levels of brightness for Flood beam mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design




BATCELL 32650 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Comes with ball joint for easy system setup



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Removable yellow filter enhances warmer color tone

VL6000P

Li ion Rechargeable Battery High Power
LED Video Light with High Color Rendering Index



FEATURES



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 18650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	600 Lm (level I), 1500 Lm (level II) 3000 Lm (level III), 6000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457g (including battery)
Buoyancy in seawater	-173g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



VL7200P Tri Color

Li ion Rechargeable Battery High Power LED
Video Light with Three Color Output



FEATURES




3 Levels of brightness for cool white mode,
3 Levels of brightness for warm white mode
1 level of brightness of Red color mode and SOS
controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x4
Li ion Rechargeable Battery




Built-in red color led enhances focusing performance



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output (Cool white mode)	1800 Lm (level I), 3600 Lm (level II) 7200 Lm (level III)
Light output (Warm white mode)	900 Lm (level I), 1800 Lm (level II) 3600 Lm (level III)
Light output (Red white mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457 g (including battery)
Buoyancy in seawater	-173 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in yellow color led enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup

th
Anniversary

VL9000P

Li ion Rechargeable Battery High Power
LED Video Light



FEATURES




4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 18650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output	900 Lm (level I), 2250 Lm (level II) 4500 Lm (level III), 9000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs(level III) 10 hrs(level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457g (including battery)
Buoyancy in seawater	-173g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Removable yellow filter
enhances warmer color
tone



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



VL15000P

Pro Mini
Li Ion Rechargeable Battery Super
Power LED Video Light



FEATURES



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650x7
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance

15000 LUMENS

Angle of light beam

160° wide beam



SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs(level III) 8hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 131mm
Weight in air	800 g (including battery)
Buoyancy in seawater	-341 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



24pcs XML LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Ergonomic
aluminum handle
comes in a
package



Protective case
for VL 15000P
Pro Mini.
Sold separately.



FILFLUORO15000
Fluorodrive filter for
VL 15000P Pro Mini.
Sold separately.

VL15000P

Pro Mini Tri Color

Li ion Rechargeable Battery Super Power LED

Video Light with Three Color Output



FEATURES



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, 1 level of brightness of Red color mode, and SOS controlled by a reliable push button design



BATCELL18650x7
Li ion Rechargeable
Battery



Battery level indicator built-in:
Blue color / Green color /
Red color / Flash Red color



Built-in red color led
enhances focusing
performance

15000 LUMENS

Angle of light beam

160° wide beam



SPECIFICATIONS

Light source	32 x XML LED + 8 x XPE Red LED
Light output (Cool white mode)	3750 Lm (level I), 7500 Lm (level II) 15000 Lm (level III)
Light output (Warm white mode)	1500 Lm (level I), 3000 Lm (level II) 6000 Lm (level III)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 131 mm
Weight in air	815 g (including battery)
Buoyancy in seawater	-356 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Built-in yellow color led enhances warmer color tone



Ergonomic aluminum handle comes in a package



Comes with ball joint for easy system setup



Protective case for VL I5000P Pro Mini Tri Color. Sold separately.



FILFLUORO I5000 Fluoride filter for VL I5000P Pro Mini Tri Color. Sold separately.

VL33000P

Li ion Rechargeable Battery
Ultra Power LED Video Light



FEATURES



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Easy to charge up the
battery pack
BATCELL26650x8



Built-in red color led
enhances focusing
performance



SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output (Cool white mode)	3300 Lm (level I), 8250 Lm (level II) 16500 Lm (level III), 33000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL26650x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 100 x L. 137.6mm
Weight in air	1700 g (including battery)
Buoyancy in seawater	-611 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

**The Most
Brightness
33000
LUMENS**
Angle of light beam
160°



45pcs XML LED to provide 33000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Protective case for VL 33000P. Sold separately.

VTL6300P

Li ion Rechargeable Battery High Power LED Video / Tech Light



FEATURES



4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x4
Li ion Rechargeable
Battery



Built-in red color
led enhances
focusing
performance



SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	630 Lm (level I), 1575 Lm (level II) 3150 Lm (level III), 6300 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs(level III) 12 hrs(level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 152.3mm
Weight in air	498g (including battery)
Buoyancy in seawater	-161g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Removable yellow
filter enhances
warmer color tone



Sturdy glove for
hands-free operation
underwater



Comes with ball
joint for easy
system setup



Angle of light beam

VTL3500P

Li ion Rechargeable
Battery LED Video / Tech Light



120°
Wide beam
10°
Narrow beam




Sturdy glove for hands-free operation underwater



4 levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Removable yellow filter enhances warmer color tone



Angle of light beam



BATCELL 32650 Li ion Rechargeable Battery



Comes with ball joint for easy system setup

SPECIFICATIONS

Light source	7 x XML LED + 2 x XPE Red LED
Light output (Flood beam mode)	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.5 x L. 140.6 mm
Weight in air	432 g (including battery)
Buoyancy in seawater	-205 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

TL3500P

Li ion Rechargeable
Battery LED Tech Light



4 Levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 32650 Li ion Rechargeable Battery



Ergonomic aluminum handle comes in a package



Sturdy Goodman Glove for handy Tech-diver operation



Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.

SPECIFICATIONS

Light source	3 x XML LED
Light output	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63x L. 135.6 mm
Weight in air	447 g (including battery)
Buoyancy in seawater	-217 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

TL4800P

Li ion Rechargeable Battery
High Power LED Tech Light



FEATURES



4 Levels of brightness
and SOS controlled
by a reliable push
button design



BATCELL 18650x4
Li ion Rechargeable
Battery



Sturdy Goodman
Glove for handy
Tech-dive operation



Ergonomic aluminum
handle comes in a
package



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs(level III) 8 hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 72 x L. 150.3mm
Weight in air	596 g (including battery)
Buoyancy in seawater	-222 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Goodman handle with
connector or
Slim fit Goodman
handle with connector.
Sold seperately.



TL4800PC Slim

Li ion Rechargeable Battery
High Power LED Tech Light with
Battery Canister



FEATURES



4 Levels of brightness
and SOS controlled by a
reliable push button
design



BATCELL 18650x8
Li ion Rechargeable
Battery



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Ergonomic aluminum
handle comes in a
package



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x8
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 55 x L. 181.5mm
Weight in air (Light head)	380g
Weight in air (Canister)	713g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-267g
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Slim fit Goodman handle with connector. Comes in a package



90 degree sidemount connector cable. Sold separately.



Easy to charge up the canister



TL4800PC light head and Canister for TL4800PC Slim can buy separately.

VTL6300PC Slim

Li Ion Rechargeable Battery
High Power LED Video/Tech Light
with Battery Canister



FEATURES



4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Battery level indicator built-in:
Blue color /
Green color /
Red color /
Flash Red color



BATCELL
18650x8
Li ion
Rechargeable
Battery



Built-in red color led
enhances
focusing
performance



Slim fit
Goodman
handle with
connector.
Comes in
a package



6300
lumens

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	630 Lm (level I), 1575 Lm (level II) 3150 Lm (level III), 6300 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x8
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs(level III) 24 hrs(level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 55.4 x L. 108.4mm
Size (Canister)	Dia. 55 x L. 181.5mm
Weight in air (Light head)	289g
Weight in air (Canister)	713g
Buoyancy in seawater (Light head)	-77g
Buoyancy in seawater (Canister)	-267g
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Removable
yellow
filter
enhances
warmer
color tone



Comes with
ball joint for
easy system
setup



90 degree side-
mount
connector
cable.
Sold separately.



Easy to
charge up
the canister



Angle of
light beam



VTL6300PCLH
light head and
Canister for
VTL6300PC
Slim can buy
separately.

TL18000P

Li ion Rechargeable Battery
Super Power LED Tech Light



FEATURES



4 Levels of brightness
and SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Easy to charge up the
battery pack
BATCELL15K

18000
lumens

SPECIFICATIONS

Light source	14 x XML LED
Light output	1800 Lm (level I), 4500 Lm (level II) 9000 Lm (level III), 18000 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL15K
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs(level III) 12 hrs(level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 124 x L. 174.5mm
Weight in air	2465 g (including battery)
Buoyancy in seawater	-880 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Ergonomic aluminum handle comes in a package



Protective case for TL 18000P.
Sold separately.



TL18000PC

Li ion Rechargeable Battery Super Power
LED Tech Light with Battery Canister



FEATURES



4 Levels of brightness
and SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL15K Li ion
Rechargeable Battery



Ergonomic aluminum
handle comes in a
package

18000
lumens

SPECIFICATIONS

Light source	14 x XML LED
Light output	1800 Lm (level I), 4500 Lm (level II) 9000 Lm (level III), 18000 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL15K
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 124 x L. 105.2mm
Size (Canister)	Dia. 104 x L. 142mm
Weight in air (Light head)	1432g
Weight in air (Canister)	1741g
Buoyancy in seawater (Light head)	-460g
Buoyancy in seawater (Canister)	-523g
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Protective case for
TL 18000PC.
Sold separately.



Easy to charge up
the canister

th
Anniversary

TL3500P^{Supreme}

Li ion Rechargeable Battery LED Tech Light



SPECIFICATIONS

Light source	3 x XML LED
Light output	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I 8650x4 SUPREME
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63x L. 119 mm
Weight in air	517 g (including battery)
Buoyancy in seawater	-221 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL I 8650x4 SUPREME
Li ion Rechargeable
Battery



Ergonomic aluminum
handle comes in a
package



Sturdy Goodman Glove
for handy Tech-dive
operation



Goodman handle
with connector or
Slim fit Goodman
handle with
connector.
Sold separately.

AL250


Multi-function Aluminum LED Light

250
lumens



SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included

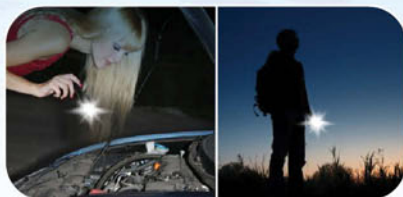

Light is suitable for multi-function



Operate with 2xAA
batteries



Our light can fit in
glove or pouch. Sold
separately.



Available in 5 colors

AL 450WM Tail

LED Aluminum Diving Light with
Tail Switch Button



450
lumens



Push on / off button on the bottom



3xAAA stand-alone
battery holder



AL 450WM Tail LED with
Glove



AL 450WM Tail LED with
Pouch



AL 450WM Tail LED with
Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button



AL450NM Tail Spotter

Narrow Beam Aluminum LED Light with Tail Switch Button

NEW

450
lumens



Push on / off button on the bottom



3xAAA stand-alone battery holder



AL 450NM Tail LED with Glove



AL 450NM Tail LED with Pouch



AL 450NM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.42 x L.125.4mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 185g (including batteries) weight in air
- -79g (including batteries) buoyancy in seawater
- Switching System : Push Button



AL1200NP Tail

Li ion Rechargeable Battery Narrow Beam
LED Light with Tail Switch Button



1200
lumens



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs(level III) 10 hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35 x L. 152.1 mm
Weight in air	195 g (including battery)
Buoyancy in seawater	-93 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Protective case for
AL 1200NP Tail.
Sold separately.



Our light can fit in
glove or pouch. Sold
separately.



FILREDNP Red filter
for AL 1200NP Tail
Sold separately.

AL1200WP Tail

Li ion Rechargeable Battery Wide Beam
LED Light with Tail Switch Button



1200
lumens



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs(level III) 10 hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 38.8 x L. 141 mm
Weight in air	195 g (including battery)
Buoyancy in seawater	-101 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Comes with the clip
for easy system setup



Snoot connector for
AL1200WP Tail.
Sold separately.



Our light can fit in
glove or pouch. Sold
separately.



Removable red and
yellow filters enhances
focusing performances
and warm color tone



Protective case for
AL 1200WP Tail.
Sold separately.

AL1100RAFO

Li ion Rechargeable Battery Wide Beam
LED Light with Auto-Flash Off Function



SPECIFICATIONS

Light source	XML LED + 2 x XPE Red LED
Light output	110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	55° wide beam
Color temperature	6500K
AFO interval	0.5sec. +/- 0.1 sec.
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 47.4 x L 128.3 mm
Weight in air	264 g (including battery)
Buoyancy in seawater	-135 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Comes with ball joint
for easy system setup



Automatic Flash Off
Function AFO interval:
0.5 sec. +/- 0.1 sec.



Built-in red color
led enhances
focusing
performance

RGB White

Li ion Rechargeable Battery 4 Colors
LED Light



SPECIFICATIONS

Light source	XML LED
Light output	250 Lm (white), 170 Lm (red) 30 Lm (blue), 200 Lm (green)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	4 hrs
Maximum depth	100 m tested
Size	Dia. 38.8 x L. 134 mm
Weight in air	182 g (including battery)
Buoyancy in seawater	-92 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



4 colors of light and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Built-in red color Led



Comes with the clip for
easy system setup



Built-in green color Led



Snoot Connector
for RGB White.
Sold separately.



Built-in blue color Led

AL1200NP

Li ion Rechargeable Battery Narrow
Beam LED Light



1200
lumens



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35 x L. 145.1 mm
Weight in air	178 g (including battery)
Buoyancy in seawater	-79 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Protective case for
AL 1200NP.
Sold separately.



Our light can fit in
glove or pouch. Sold
separately.



FILREDNP Red filter
for AL1200NP.
Sold separately.

AL1200WP

Li ion Rechargeable Battery Wide
Beam LED Light



1200
lumens



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 38.8 x L. 134 mm
Weight in air	182 g (including battery)
Buoyancy in seawater	-92 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Comes with the clip
for easy system setup



Removable red and
yellow filters enhances
focusing performances
and warm color tone



Our light can fit in
glove or pouch. Sold
separately.



Snoot Connector for
AL1200WP.
Sold separately.




Protective case for
AL1200WP.
Sold separately.

AL 1200XWP

Li ion Rechargeable Battery Extra Wide
Beam LED Light



1200
lumens




SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 38.8 x L. 127.5 mm
Weight in air	170 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Comes with the clip
for easy system setup



Removable red and
yellow filters enhances
focusing performances
and warm color tone



Our light can fit in
glove or pouch. Sold
separately.



Snoot Connector for
AL1200XWP.
Sold separately.



Protective case for
AL 1200XWP.
Sold separately.

LIGHT HEAD



VTL
6300PLH



VL
6000PLH



TL
4800PLH



VL 9000PLH/
VL7200PLH
Tri color



Light heads can fit for VTL 6300P, TL 4800P, VL 9000P, VL 7200P Tri Color & VL 6000P.



VTL
3500PLH



TL
3500PLH



Light heads can fit for VTL 3500P & TL 3500P.



AL 1200
NPLH



AL 1200
WPLH



AL 1200
XWPLH



AL1100R
AFOLH



RGB
WHITE LH



Light heads can fit for AL 1200NP, AL 1200WP, AL 1200XWP, AL 1100RAFO & RGB White.

Black Molly II

AL1800XWP

Tri Color



Available in 2 colors

SPECIFICATIONS


Light source	4 x XML LED + 2 x XPE Red LED
Light output (Cool white mode)	450Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Warm white mode)	450Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 38.8 x L. 127.5 mm
Weight in air	223 g (including battery)
Buoyancy in seawater	-112 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in red color led enhances focusing performance



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL26650 Li ion Rechargeable Battery



Built in yellow color led enhances warmer color tone



Comes with ball joint for easy system setup



Protective case for AL 1800XWP Tri Color and Single Arm Tray. Sold separately.



Protective case for AL 1800XWP Tri Color. Sold separately.

Black Molly III AL2600XWP

2600
lumens

BUILT-IN
RED
LIGHT

ERM
EASY RELEASE
MOUNT



Available in 2 colors

SPECIFICATIONS


Light source	4 x XML LED + 2 x XPE Red LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 38.8 x L. 127.5 mm
Weight in air	223 g (including battery)
Buoyancy in seawater	-112 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color /
Flash Red color



Removable yellow
filter enhances
warmer color tone



BATCELL26650 Li ion
Rechargeable Battery



Comes with ball joint
for easy system setup



Protective case for
AL 2600XWP and
Single Arm Tray.
Sold separately.



Protective case for
AL 2600XWP.
Sold separately.

CF 450

450
lumens

5X
Focusable



Available in 3 colors

SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3xAAA alkaline or Ni-MH batteries
Angle of light beam	7° to 37° adjustable
Color temperature	6500K
Burn time	Up to 4hrs
Maximum depth	100 m tested
Size	Dia. 39.5 x L. 131.9mm
Weight in air	235 g (including batteries)
Buoyancy in seawater	-113 g (including batteries)
Switching system	Magnetic Swivel
Front glass	Tempered optical glass & Convex Lens
Lanyard	Included



Twist the front to change the focus (Turning force increases with depth)



Magnetic Swivel Switch allows for one hand operation



CF 450 LED with Glove



3xAAA stand-alone battery holder



CF 450 LED with Pouch



CF 450 LED with Pouch and Glove

CF1200P

Li ion Rechargeable Battery Changeable
Focus LED Light

5X
Focusable

1200
lumens



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 39.5 x L. 172.1 mm
Weight in air	250 g (including battery)
Buoyancy in seawater	-117 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Twist the front to
change the focus
(Turning force
increases with depth)

HL450N

Narrow Beam LED HEAD Light

450
lumens



SPECIFICATIONS

Light source	Cree LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41mm
Weight in air	187 g (including batteries)
Buoyancy in seawater	-56 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness
and SOS controlled by
a reliable push button
design



3 x AAA alkaline
batteries



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



FILREDHLN Red
filter for HL 450N.
Sold separately.

Anniversary

H L450XW

Extra Wide Beam LED HEAD Light

450
lumens



SPECIFICATIONS

Light source	2 x Cree LED +2 x XPE Red LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs(level III) 8 hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8 mm
Weight in air	189 g (including batteries)
Buoyancy in seawater	-58 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



3 x AAA alkaline
batteries

HL1000N

Li ion Rechargeable Battery
Narrow Beam LED HEAD Light

1000
lumens



SPECIFICATIONS

Light source	Cree LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs(level III) 8 hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41mm
Weight in air	205 g (including battery)
Buoyancy in seawater	-74 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650 Li ion
Rechargeable Battery



FILREDHLN Red filter
for HL 1000N.
Sold separately.

HL1000XW

Li ion Rechargeable Battery
Extra Wide Beam LED HEAD Light

1000
lumens



SPECIFICATIONS

Light source	2 x Cree LED +2 x XPE Red LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL I8650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs(level III) 8 hrs(level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8mm
Weight in air	207 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL I8650 Li ion
Rechargeable Battery

Easy Clip Rainbow Color Light



SPECIFICATIONS

- Available fifteen color output – Red, Green, Orange, Blue, Purple, Yellow, Light Blue, Flash red, Flash green, Flash orange, Flash blue, Flash purple, Flash yellow, Flash light blue automatically run all fourteen modes.
- 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

Easily clip the light on the
goggle, mask, belt and etc.

Easy Clip Light



SPECIFICATIONS

- Available three color output – Blue, Red, Green
- Up to 72 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

th
Anniversary



Combo Pack Series



AL 450 NM Tail Spotter

Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1200NP

Li ion Rechargeable Battery Narrow
Beam LED Light



AL 450 NM Tail Spotter

Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1200WP

Li ion Rechargeable Battery Wide
Beam LED Light



AL 250

Multi-function Aluminum LED Light

AL 1200NP

Li ion Rechargeable battery
Narrow Beam LED Light





AL 450 WM Tail

LED Aluminum Diving Light with
Tail Switch Button

AL 1200NP

Li ion Rechargeable Battery Narrow
Beam LED Light



AL 450 WM Tail

LED Aluminum Diving Light with
Tail Switch Button

AL 1200WP

Li ion Rechargeable Battery Wide
Beam LED Light



AL 250

Multi-function Aluminum LED Light

AL 1200WP

Li ion Rechargeable battery
Wide Beam LED Light



Green Spot Light

Red Spot Light




Operate with
2 x AAA batteries



CLIPMINTSPOT
Mounting clip for: Green Spot Light
and Red Spot Light. Sold separately.

SPECIFICATIONS	GREEN SPOT LIGHT	RED SPOT LIGHT
Light source	: Green Laser	Red Laser
Light output	: Below 1 mW	Below 1 mW
Casing material	: Aluminum alloy. Anti-corrosive anodized	Aluminum alloy. Anti-corrosive anodized
Power source	: 2 x AAA alkaline or Ni-MH batteries	2 x AAA alkaline or Ni-MH batteries
Wavelength	: 520nm	650nm
Burn time	: Up to 24 hrs	Up to 24 hrs
Maximum depth	: 100 m tested	100 m tested
Size	: Dia. 19 x L. 168.6 mm	Dia. 19 x L. 154.1 mm
Weight in air	: 89 g (including batteries)	82 g (including batteries)
Buoyancy in seawater	: -54 g (including batteries)	-51 g (including batteries)
Switching system	: Twisting Bezel	Twisting Bezel
Front glass	: Tempered optical glass	Tempered optical glass
Lanyard	: Included	Included

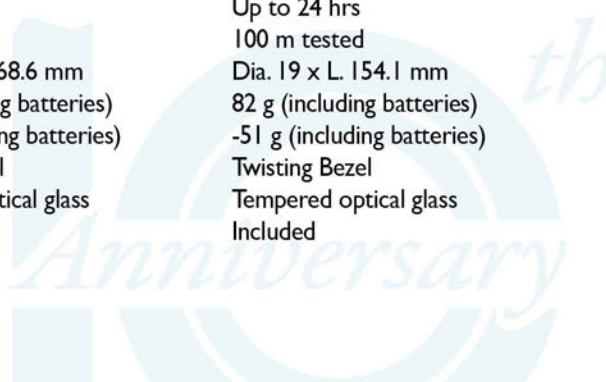

Protective Case Series



Model :	PC 101	PC 102	PC 103	PC 104	PC 105	PC 106	PC 107
Outer dimension :	230 x 190 x 90 mm	280 x 246 x 106 mm	355 x 272 x 106 mm	355 x 272 x 166 mm	415 x 335 x 120 mm	415 x 335 x 180 mm	546 x 400 x 200 mm
Inner dimension :	207 x 143 x 79 mm	260 x 220 x 93 mm	335 x 230 x 93 mm	335 x 230 x 153 mm	388 x 272 x 108 mm	388 x 272 x 168 mm	490 x 333 x 172 mm
Case can fit for	AL1200NP, AL1200WP, AL1200XWP, CF1200P, Black Molly II, Black Molly III, AL1200NP Tail, AL1200WP Tail, AL1100RAFO, RGB White	VL4000P, VTL3500P, TL3500P, TL3500P Supreme	VL9000P, VL7200P Tri Color, VTL6300P, TL4800P, VL6000P	VL33000P, TL18000P, VL15000P Pro Mini, VL15000P Pro Mini Tri Color	Go Pro Tray Kit Set	TL18000PC, TL4800PC Slim, VTL6300PC Slim	All Purpose

Fluorodive Kit Sets

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.

Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions.

These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers.

Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!



Photos of the fluorescence stimulated by the specific wavelength and captured through a barrier filter

Camera Filters

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.



FILFLUOR015000

Fluorodive filter for VL 15000P Pro Mini /
VL 15000P Pro Mini Tri Color



FDKCF250

CF450 / CF1200P / AL1200WP / AL1200XWP / AL1200WP Tail / BLACK MOLLY II /
BLACK MOLLY III / HL1000XW / HL450XW Fluorodive Kit



FDKVL1800

VTL3500P / VTL6300P / VL9000P
VL7200P Tri Color /
VL6000P Fluorodive Kit



FDKVL4000

VL4000P Fluorodive Kit



CAMERA TRAY 27



Camera Tray 27 with 27cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Olympus TG4/ TG5 Housings.

BBGPTray Go Pro Tray



Go Pro Hot Shoe Adapter



Go Pro Kit sets

GP4000 Kit

- 1 pc. of Double Clip (CLP02)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP1200 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



Protective Case for Go Pro Tray Kit Set

- 1 pcs. of ALI200WVP
- 1 pcs. of ALI200XWP
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable Go Pro Tray



SINGLEARMTRAY

Single Arm Go Pro Tray



FLEXIGPTRAY

7" Flexi Arm Go Pro Tray



FLEXISINGLEARMTRAY

7" Flexi Arm Single Arm Tray



FLEXIEXTENDGPTRAY

7" Flexi Arm Extendable Go Pro Tray



Accessories



BATCELL18650

Battery for AL1200NP / AL1200WP /
AL1200XWP / AL1200NP Tail / AL1200WP Tail /
CF1200P / AL1100RAFO /
HL1000XW / HL1000N / RGBWhite




BATCELL26650

Battery for Black Molly II /
Black Molly III



BATCELL32650

Battery for VL4000P / VTL3500P /
TL3500P



BATCELL18650x4

Battery for VL9000P / VTL6300P /
TL4800P / VL7200P Tri Color /
VL6000P



BATCELL15K

Battery for TL18000P / TL18000PC




BATCELL18650x7

Battery for VL15000P Pro Mini /
VL15000P Pro Mini Tri Color



CR2023

Battery for Easy Clip Light



BATCELL18650x8

Battery for TL4800PC Slim /
VTL6300PC Slim



BATCELL18650x4SUPREME

Battery for TL3500P Supreme



BATCELL26650x8

Battery for VL33000P



BATCHR18650x4

Charger for VL9000P / VTL6300P /
TL4800P / VL7200P Tri Color / VL6000P



BATCHR15K

Charger for
TL18000P / TL18000PC



**BATCHR18650x4
SUPREME**

Charger for TL3500P Supreme



BATCHR26650x8

Charger for VL33000P



BATCHR18650x7

Charger for VL15000P Pro Mini /
VL15000P Pro Mini Tri Color



BATCHR32650/26650

Charger for VL4000P /
VTL3500P / TL3500P /
Black Molly II / Black Molly III



BATCHR18650x8

Charger for TL4800PC Slim /
VTL6300PC Slim



BATCHR18650

Charger for AL1200NP / AL1200WP /
AL1200XWP / AL1200NP Tail / AL1200WP Tail /
CF1200P / AL1100RAFO / HL1000XW /
HL1000N / RGBWhite

Accessories



PISTOLGRIPHANDLE

Pistol Grip Handle for Black Molly II / Black Molly III / TL 3500P / VTL3500P / TL3500P Supreme / VL4000P / VL6000P / VL9000P / VL7200P Tri Color / VTL6300P / TL4800P / VLI5000P Pro Mini / VLI5000P Pro Mini Tri Color



SNOOT

Snoot Connector for ALI200WP / ALI200XWP / ALI200WP Tail / RGB White



SIDEMOUNTCONNECTOR CABLE-90

90 degree sidemount connector cable for TL4800PC Slim / VTL6300PC Slim



CONNECTOR CABLE-180

180 degree connector cable for TL4800PC Slim / VTL6300PC Slim



TLGGLOVE

Goodman glove for TL3500P Supreme



VLGGLOVE

Reinforced goodman glove for VL 4000P / VTL3500P / TL3500P / VL9000P / VTL6300P / VL6000P / TL4800P / VL7200P Tri Color



NPGGLOVE

Neoprene glove for ALI200NP / ALI200WP / ALI200XWP / ALI200NP Tail / ALI200WP Tail



NPGGLOVEM

Neoprene glove for Mini Light



NPHOODMS

Neoprene hood for one light holster



NPHOODMD

Neoprene hood for two light holster



NPRPOUCH

Neoprene pouch with retractor for ALI200NP / ALI200WP / ALI200XWP / ALI200NP Tail / ALI200WP Tail



NPRPOUCHM


Neoprene pouch with retractor for Mini Light

Accessories




LANTHANDLE

Lantern style handle



GHA-01C

Goodman handle with connector for
TL3500P / TL4800P / TL4800PC Slim /
VTL6300PC Slim / TL3500P Supreme /
TL18000P / TL18000PC



SFGHA-01C

Slim fit Goodman handle with
connector for TL3500P / TL4800P /
TL4800PC Slim / VTL6300PC Slim /
TL3500P Supreme



CLIPMNTSPOT

Mounting clip for Green Spot Light /
Red Spot Light



CLIPMNTAL

Mounting clip for ALI200WP /
ALI200XWP / CF1200P



CLIPMNTCF

Mounting clip for CF450 /
AL450VWM Tail / ALI200VWP Tail



FDMASKYL

Yellow filter for Fluorodiving



FILFLUORO15000

Fluorodive filter for
VLI5000P Pro Mini /
VLI5000P Pro Mini Tri Color



FILREDNP

Red filter for ALI200NP /
ALI200NP Tail



FILREDHLN

Red filter for HL1000N /
HL450N



FILYELSM

Yellow filter for ALI200WP /
ALI200XWP / ALI200VWP Tail /
Black Molly III /
HL450XW / HL1000XW



FILREDSM

Red filter for ALI200WP /
ALI200XWP /
ALI200VWP Tail



FILYELLG

Yellow filter for
VTL3500P / VL9000P /
VTL6300P



FILYEL4000

Yellow filter for
VL4000P

Photo/Video Arms & Accessories

Float Arms Series



9" Float Arm

Dia. 70 x 228mm

Weight above water : 281g

Buoyancy lift : 360g

Flexi Arms Series



7" Flexi Arm



9" Flexi Arm



6" Flexi Arm
Hot Shoe YS Adapter



6" Flexi Arm
Hot Shoe Ball Adapter



YS Adapter

Photo/Video Arms & Accessories

Arms

- Full T6061 grade aluminum
- Triangular structural design makes it strong and lightweight
- Available in 4 lengths: 5", 8", 12", 16"



Clips

- Made of T6061 grade aluminum
- Available in 2 versions: double clip and a triple clip
- Ergonomic handle makes it easy to twist on and off

CLP 02 Double clip



CLP 03 Triple clip



Easy Release Mount Series



Easy Release
Glove



Easy Release
Goodman Handle



Easy Release
GoPro
Mount Glove



Easy Release
Slim Fit
Goodman Handle



DA Series



DA001

Hot Shoe Adapter



DA002

Sea & Sea Adapter



DA003

Light & Motion Adapter



DA004

Standard Dovetail Plate



DA005

8mm Thread



DA006

Sea & Sea Light Adapter



DA007

Sea & Sea Hot Shoe Adapter



DA008

Sea & Sea Medium



DA009

Sea & Sea Standard



DA010

Base Plate Ball Mount



DA011

T-Groove Adapter



DA012

Universal Mount Base



DA013F

1/4" Thread Adapter



DA013M

1/4" Thread Adapter



DA014

Ikelite 200 Strobe Adapter



DA015

Single Ball Arm with Sea & Sea Adapter



DA016

UK Light Adapter



DA017

Standard Dovetail



DA018

Iron Z Series Strobe Adapter



DA022

Slot Stay



DA023

6mm Thread Adapter

Specifications subject to change without prior notice.



Our Distributors & Dealers

Australia Distributor : Adreno

Contact Person : Robbie Lewis
E-mail : robbie@adreno.com.au
Phone : 61-07-3391-2299
Mail : 54-58 Deshon Street, Woolloongabba,
Brisbane, QLD 4102, Australia

Belgium/ Netherlands / Luxembourg Distributor : Dive Technics

Contact Person : Roman Pauwels
E-mail : roman@divetechnics.be
info@divetechnics.be
Phone : 32-0-347-504-21
Fax : 32-0-347-504-33
Mail : Pater Domstraat 45A, Broechem 2520,
Belgium

Brazil Distributor : Seasub

Contact Person : Pablo Y. Varela
E-mail : pablo@seasub.com.br
Phone : 55-11-38328342
Mail : Rua Baumann, 1039/1051,
Cep 05318000,
Sao Paulo, Brazil

Canada Distributor : Pacific Scuba Industries

Contact Person : Michael Joseph & Laura Valente
E-mail : laurabigblue@outlook.com
Phone : 778-245-1962
Mail : 31519 Southern Dr, Abbotsford, BC V2T5P1,
Canada

France / Europe Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : yannig@customdivingsystems.com
Phone : +33 (0) 6 114 81 114
Mail : 14 rue Jean Croisa - 13009 Marseille , France

Indonesia Distributor : Diveesa Indonesia

Contact Person : Chatra Hapsoro
E-mail : bigblue.id@gmail.com
Phone : 62-82145490450
Mail : Metro Park Residence, Unit MA-LG-05,
JL. Pilar Mas Utama Raya Kav 28,
Kebon Jeruk, Jakarta Barat 11520 Indonesia

Japan Distributor : Zero Co., Ltd.

Contact Person : Katsuhiko Saotome
E-mail : zero@zero-zero.co.jp
Phone : 81-3-5721-1906
Fax : 81-3-5721-1910
Mail : 1-11-5 Takaban, Meguro-Ku,
Tokyo, Japan

Korea Distributor : King Sports

Contact Person : Mr. Chang / Yun Hee Chang
E-mail : kingdive@kingsports.co.kr
Phone : 82-2-3628251
Mail : 35-4, 1GA, Manri-Dong, Chung-Gu,
Seoul, Korea

Kuwait Dealer : Hashim Alaqeel Establishment

Contact Person : Abdullah Al Aqeel
E-mail : abdul_72@yahoo.com
Phone : 96-566621121
Mail : Qebila Block: 8, Building : 38, 1st Floor ,
Office 26 Kuwait City, State of Kuwait

Malaysia Distributor : Rainbow Runner Sdn Bhd

Contact Person : Sim
E-mail : ops@rainbowrunner.net
Phone : 60-341-622837
Fax : 60-341-617837
Mail : 5, Ukay Boulevard, Jalan Lingkaran
Tengah 2, Hulu Kelang, 68000 Ampang,
Selangor, Malaysia

Maldives Dealer : Surf & Scuba Maldives PVT Ltd.

Contact Person : Ali Miuraj
E-mail : bonul.e@gmail.com
Phone : 90-7999341
Mail : Rehndhi 248, Ground Floor
Vili Male 21049
Maldives



New Zealand Distributor : Sea Tech Ltd.

Contact Person : Dave Moran
E-mail : info@seatech.co.nz
Phone : 64-9-5210684
Mail : 47 Tautari St. Orakei, Auckland 1071,
New Zealand

**Philippines Distributor :
Dive Supply Subic, INC.**

Contact Person : Rowena Merto
E-mail : muriel@aquaventurewhitetip.com
Phone : 63-2-708-9996
Mail : Office 6&7 EMS Building, 14th Street
Subic Gate Perimeter Road, Subic Bay
Freeport Zone, Olongapo City,
2222 ,Philippines

Poland Distributor : Waterfall

Contact Person : Darek
E-mail : darek@waterfall.pl
Phone : 48-600-340-002
Mail : UL. Klimczaka 22D/3, 02-797 Warszawa
Poland PL 7621470585

Scandinavian Distributor : AquaFun AB

Contact Person : Sales Office
E-mail : info@aquafun.se
Phone : 46-0-40-295-300
Mail : Sangleksgatan 4E, 215 79, Malmo,
Sweden

**Singapore Distributor :
DiveSea Pte Ltd**

Contact Person : Fairuz Ahmad
E-mail : team@divesea.com.sg
Phone : 65-85115164
Mail : 3 Coleman Street, #03-22,
Peninsula Shopping Centre
Singapore 179804

**South Africa Distributor:
Manex & Power Marine**

Contact Person : Gavin Jones
E-mail : gavin.jones@manex.co.za
Phone : 27-021-511-7292
Mail : 9 Paarden Eiland Road, Paarden Eiland,
South Africa

**Switzerland Distributor :
Tiefenstein AG, Unterwasserwelten**

Contact Person : Garry Stuber & Erwin Rudolf
E-mail : bigblue@tiefenstein.ch
garrystuber@tiefenstein.ch
Phone : 41-0-715350973
Mail : Seestrasse 19, CH-9326, Horn, Switzerland

Thailand Distributor : Scuba Republic Thailand

Contact Person : Woranan Samakoses
E-mail : scubarepublicthailand@gmail.com /
bigbluelightsthai@gmail.com
Phone : 66-0-617732363
Mail : 52 Moo 8, Theparatana (Bangna – Trad) Road,
KM. 7, Bangkaew, Bangplee, Samutprakarn 10540
Thailand

**Turkey Distributor : K Pro Doga Sporlari
Malzemeleri Tic. Ltd. STI**

Contact Person : Akin Kaftanoglu
E-mail : akinkaftanoglu@yahoo.com
Phone : 90-3124334479
Mail : Bulbulderesi Cad. No.: 23/A, Seyranbaglari,
Ankara, Turkey

U.A.E. Distributor : Senyar Marine Equipment

Contact Person : Abdulla Ai Kindi
E-mail : senyar7@gmail.com
Phone : 971-2-666-9999
Fax: 971-2-643-9960
Mail : P.O. Box 112790, Abu Dhabi, U.A.E.

**United Kingdom / Ireland Distributor :
Liquid Sports Ltd.**

Contact Person : Alastair Ansell
E-mail : alastair@liquidsports.co.uk
Phone : 44-0-7585-935522
Mail : 11 Stag Lane, Berkhamsted,
Hertfordshire, HP4 1FJ, UK

**Headquarters :
Bossk International Company Limited**

Contact Person : Oscar Tong

E-mail : oscar@bigblue.com.hk

Phone : 852-3568-0773

Fax: 852-3998-3127

Mail : Room 818, 8/F, Po Yip Building, 23, Hing Yip

Street, Kwun Tong, Hong Kong

Website : www.bigblue.com.hk

www.bigbluedivelights.com

US Sales Office : BosskUSA / Bigblue Dive Lights

Contact Person : Tim Ratcliffe

E-mail : sales@bigbluedivelights.com

Phone : 727-442-2300

Fax: 727-499-7117

Mail : 1710N Hercules Ave, Suite 103, Clearwater,

FL 33765 USA

Visit Us
on website



Like Us
on facebook

